
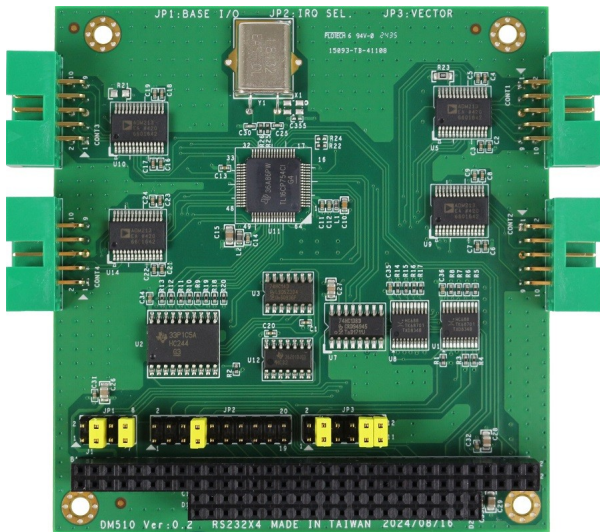


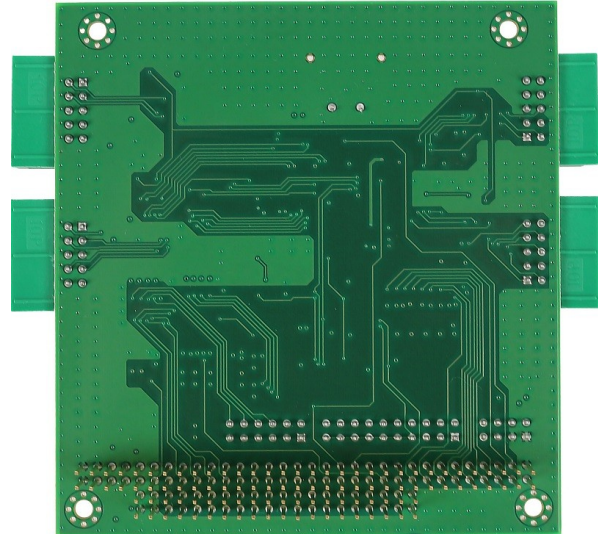

Specification

Chipset	TL16CP754C x1
	RS-232 asynchronous port x4
	Supports: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
	Interrupt select: 2, 3, 4, 5, 7
	RS-232 modem control signals
	I/O address: 100h to 300h
	Baud rate: up to 115.2kbps
Bus	PC/104 standard compliant
Connectors	2.54mm 10-pin box header for RS-232 x4
Power Requirement	Single +5V @ 200mA
Weight	100g
Dimension	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	-20°C ~ +70°C
Packing List	ICOP-1800-V2 x1 Cable RS-232 x4 Screw kit x1