
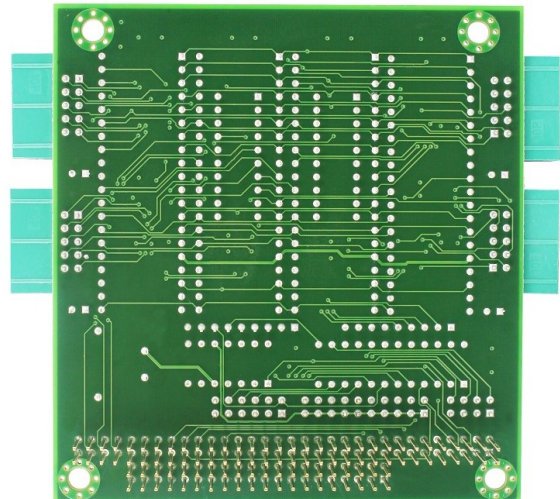


ICOP-1800

Multi RS232C Module

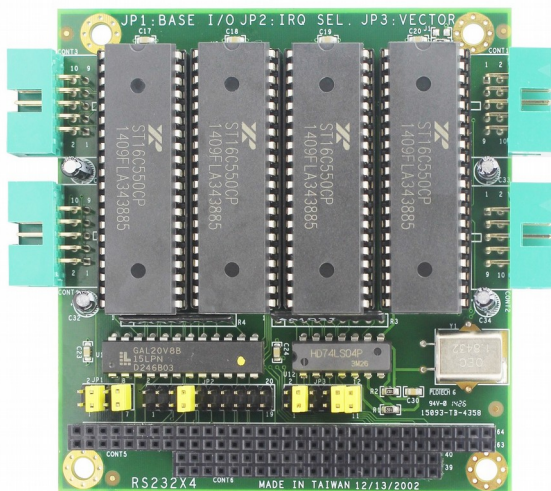

Specification

Chipset	UART 16C550 x4
	RS-232 asynchronous port x4
	Supports: Tx/D, Rx/D, RTS, CTS, DTR, DSR, DCD, GND
	Interrupt select: 2, 3, 4, 5, 7
	RS-232 modem control signals
	I/O address: 100h to 300h
Bus	Baud rate: up to 115.2kbps
	PC/104 standard compliant
Connectors	2.54mm 10-pin box header for RS-232 x4
Power Requirement	Single +5V @ 200mA
Weight	100g
Dimension	90 x 96mm (3.54 x 3.77 inches)
Operating Temperature	0°C ~ +55°C
Packing List	ICOP-1800 x1
	Cable RS-232 x4
	Screw kit x1

