



User's Manual

PPC-090T-TGL

Intel® Tiger Lake Processor

Compact Panel PC with 9" Resistive / PCAP Touch Screen

PPC-090T-TGL-8G / PPC-090T-TGL-**P**8G

PPC-090T-TGL-16G / PPC-090T-TGL-**P**16G

PPC-090T-TGL-32G / PPC-090T-TGL-**P**32G

PPC-090T-TGL-64G / PPC-090T-TGL-**P**64G

(Revision 1.0A)

REVISION

DATE	VERSION	DESCRIPTION
2025/4/10	Version 1.0A	New Release

ICOP TECHNOLOGY INC.

COPYRIGHT

The information in this manual is subject to change without notice for continuous improvement in the product. All rights are reserved. The manufacturer assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the information contained in this manual.

No part of this manual may be reproduced, copied, translated or transmitted, in whole or in part, in any form or by any means without the prior written permission of the ICOP Technology Inc.

©Copyright 2025 ICOP Technology Inc.
Manual # IUMPPC090TTGL-01 Ver.1.0A Apr, 2025

TRADEMARKS ACKNOWLEDGMENT

Intel® Tiger Lake is the registered trademark of Intel Corporation. Other brand names or product names appearing in this document are the properties and registered trademarks of their respective owners. All names mentioned herewith are served for identification purpose only.

For more detailed information or if you are interested in other ICOP products, please visit our official websites at:

- Global: www.icop.com.tw
- USA: www.icoptech.com
- Japan: www.icop.co.jp
- Europe: www.icoptech.eu
- China: www.icop.com.cn

For technical support or drivers download, please visit our websites at:

- https://www.icop.com.tw/resource_entrance

This Manual is for the PPC-090T-TGL series.

SAFETY INFORMATION

- Read these Safety instructions carefully.
- Please carry the unit with both hands, handle carefully.
- Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
- Do not expose your Panel PC to rain or moisture in order to prevent shock and fire hazard.
- Input voltage +12~24VDC Power Adapter Only
- Operating temperature between 0~+60°C / -20~+60°C **(Option)**
- Keep PPC-090T-TGL away from humidity.
- When a M.2 SSD storage is the main operating system storage, please turn off power before inserting or removing. Do not open the cabinet to avoid electrical shock. Refer to your nearest dealer for qualified personnel servicing.
- Never touch un-insulated terminals or wire unless your power adaptor is disconnected.
- Locate your Panel PC as close as possible to the socket outline for easy access and to avoid force caused by entangling of your arms with surrounding cables from the Panel PC.
- USB connectors are not supplied with Limited Power Sources.
- If the equipment is not used for a long time, disconnect it from the power source to avoid damage by transient overvoltage.

WARNING!



DO NOT ATTEMPT TO OPEN OR TO DISASSEMBLE THE CHASSIS (ENCASING) OF THIS PRODUCT. PLEASE CONTACT YOUR DEALER FOR SERVICING FROM QUALIFIED TECHNICIAN.

Content

Content	iv
Ch. 1 General Information	1
1.1 Product Description	2
1.2 Product Specifications	3
1.3 Inspection standard for TFT-LCD Panel	5
1.4 Product Dimensions.....	9
1.5 Mounting Instruction	10
1.6 Ordering Information.....	13
.....	15
Ch. 2 System Installation.....	15
2.1 CPU Board Outline	16
2.2 Connector Summary.....	17
2.3 Connector Pin Assignments.....	18
2.4 External I/O Overview.....	19
2.5 External I/O Pin Assignment	20
Ch. 3 Hardware Installation	22
3.1 Installing the M.2 M-key (2242/2280) PCIe Storage	23
3.2 Installing the M.2 E-Key (2230) Modules	26
Ch. 4 Drivers and BIOS Instruction	28
4.1 Operating System Support and Drivers	29
4.2 BIOS Hot Key	30
4.3 BIOS COM1 & COM2 Setting (RS232/422/485)	31
4.4 BIOS COM3 & COM4 Setting (Change Settings)	34
4.5 BIOS AT Mode Setting (Support Auto-Power On Function)	37
4.6 BIOS Serial Port Console Redirection.....	39
4.7 BIOS Load Default Setting	42
Warranty.....	43

Ch. 1

General Information

[1.1 Product Description](#)

[1.2 Product Specifications](#)

[1.3 Inspection standard for TFT-LCD Panel](#)

[1.4 Product Dimensions](#)

[1.5 Mounting Instruction](#)

[1.6 Ordering Information](#)

1.1 Product Description

ICOP Technology Inc. is proudly going to release a brand new Panel PC, which offers fanless design, low power consumption, and IP65 front panel. The PPC-090T-TGL is powered by Intel® Tiger Lake i5-1135G7 processors, and up to 64GB of SO-DIMM DDR4 module that handles processing more efficiently and provides faster performance. The resistive / project capacity touch panel with LED backlight TFT LCD increases operation convenience and visibility in outdoor environments. The ultra-compact and thin exterior design is perfect for the present demanding embedded and productive applications.

The new PPC-090T-TGL inherited PPC series' smooth appearance and ultra-texture aluminum exterior design to make your industrial applications look more stylish. The versatile I/O ports, IP65 front panel, 2.5GIGA high-speed Ethernet etc. can fulfill fundamental functions. Our consistent advantages feature stable performance, extended working temperature support, low power consumption and fanless design. The expandable customize I/O ports can be accommodated connectivity requirements to industrial machine platforms and industrial automation equipment's needs.

The PPC-090T-TGL supports Windows 10, Windows 10 IoT, Windows 11, Windows 11 IoT and Linux to meet ready-to-market demand and provide competitive advantages for customers.

1.2 Product Specifications

CPU BOARD SPECIFICATIONS

CPU	Intel® Tiger Lake i5-1135G7 (Quad core 2.4GHz)
Cache	L3: 8MB Cache
BIOS	AMI BIOS
Memory	8GB / 16GB / 32GB / 64GB DDR4
Display	Intel® HD Graphics, HDMI2.0 x 2, DP 1.4 x 2
LAN	Intel® i226-V 2.5GbE & i219-LM 1.0GbE
Audio	HD Audio-Realtek ALC888S
Internal Drives	M.2 M-key (2242/2280) PCIe Gen. 4 Support NVME (Doesn't support SATA interface)
Expansion I/O	M.2 E-key (2230) USB2.0/PCIe *1 interface (CNVi Supported)
I/O	HDMI x 2 DP x 2 RS232/422/485 (COM1 & COM2) x 2 RS232 (COM3 & COM4) x 2 USB3.2 (Gen. 2) x 4 USB2.0 x 2 RJ45 x 2 Phone Jack (Line-Out & Mic-In) x 1

MECHANICAL & ENVIRONMENT

Power Requirement	+12~24 VDC Power Adapter Only (DC JACK 5.5x2.5mm plug support)
Power Adapter	+12VDC@ 7.5A (90W)
Operating Temperature	0~+60°C / -20~+60°C (Option)

Storage Temperature	-30~+70°C
Operating Humidity	0% ~ 90% Relative Humidity, Non-Condensing
Dimensions	242.02x156.52x79.30mm (9.53"x6.16"x3.12")
Weight	2.97 Kg
Protection	IP65 Front Panel
Certification	Coming Soon

LCD SPECIFICATIONS

Display Type	9" WSVGA TFT LCD
Backlight Unit	LED
Display Resolution	1024(W) x 600(H)
Brightness (cd/m ²)	300 nits
Contrast Ratio	500 : 1
Display Color	262,144
Pixel Pitch (mm)	190.5 (H) x 189 (V)
Viewing Angle	Vertical 120°, Horizontal 140°
Backlight Lifetime	20,000 hrs

TOUCHSCREEN

Type1	Analog Resistive
Resolution	Continuous
Transmittance	80%
Controller	USB interface
Durability	1 million
Type2	Projected Capacitive Touch Screen (Optional)
Resolution	25ppi (Min.)
Transparency	86% ± 2%

Accuracy	Within 2.5mm each target
Surface Hardness	$\geq 7H$ (Pressure : 0.5N/45°)

1.3 Inspection standard for TFT-LCD Panel


DEFECT TYPE			LIMIT					Note
VISUAL DEFECT	INTERNAL	SPOT	$\varphi < 0.15\text{mm}$			Ignore		Note1
			$0.15\text{mm} \leq \varphi \leq 0.5\text{mm}$			$N \leq 4$		
			$0.5\text{mm} < \varphi$			$N=0$		
		FIBER	$0.03\text{mm} < W \leq 0.1\text{mm}, L \leq 5\text{mm}$			$N \leq 3$		Note1
			$1.0\text{mm} < W, 1.5\text{mm} < L$			$N=0$		
		POLARIZER BUBBLE	$\varphi < 0.15\text{mm}$			Ignore		Note1
			$0.15\text{mm} \leq \varphi \leq 0.5\text{mm}$			$N \leq 2$		
			$0.5\text{mm} < \varphi$			$N=0$		
		Mura	It' OK if mura is slight visible through 6%ND filter					
ELECTRICAL DEFECT	BRIGHT DOT	A Grade			B Grade			
		C Area	O Area	Total	C Area	O Area	Total	Note3
		$N \leq 0$	$N \leq 2$	$N \leq 2$	$N \leq 2$	$N \leq 3$	$N \leq 5$	Note2
	DARK DOT	$N \leq 2$	$N \leq 3$	$N \leq 3$	$N \leq 3$	$N \leq 5$	$N \leq 8$	
	TOTAL DOT	$N \leq 4$			$N \leq 5$	$N \leq 6$	$N \leq 8$	Note2
	TWO ADJACENT DOT	$N \leq 0$	$N \leq 1$ pair	$N \leq 1$ pair	$N \leq 1$ pair	$N \leq 1$ pair	$N \leq 1$ pair	Note4
	THREE OR MORE ADJACENT DOT	NOT ALLOWED						
	LINE DEFECT	NOT ALLOWED						

(1) One pixel consists of 3 sub-pixels, including R, G, and B dot. (Sub-pixel = Dot)


(2) Little bright Dot acceptable under 6% ND-Filter.

(3) If require G0 grand (Total dot $N \leq 0$), please contact region sales.


[**Note 1**] W: Width[mm]; L: Length[mm]; N: Number; ϕ : Average Diameter.

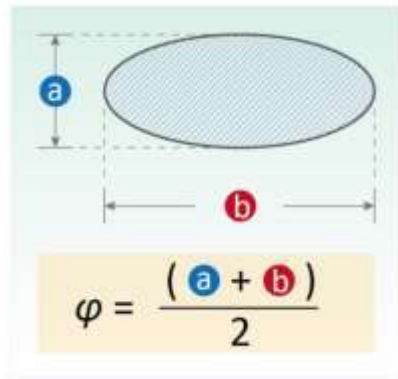


(a) White / Black Spot (b) Polarizer Bubble

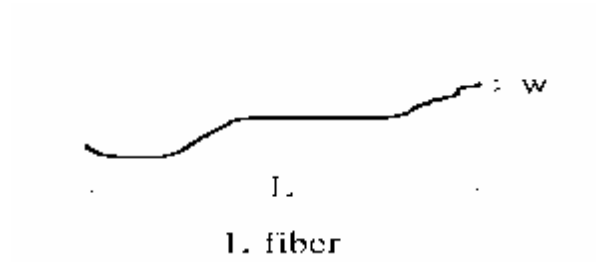

[**Note 2**] Bright dot is defined through 6% transmission ND Filter as following.

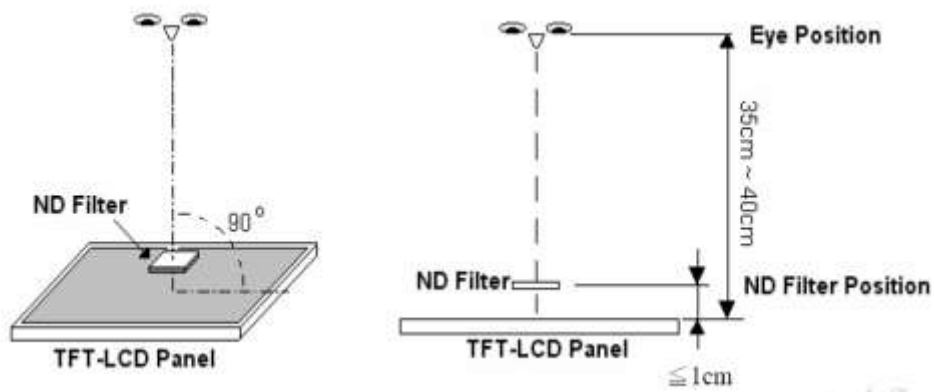


[**Note 3**] Display area

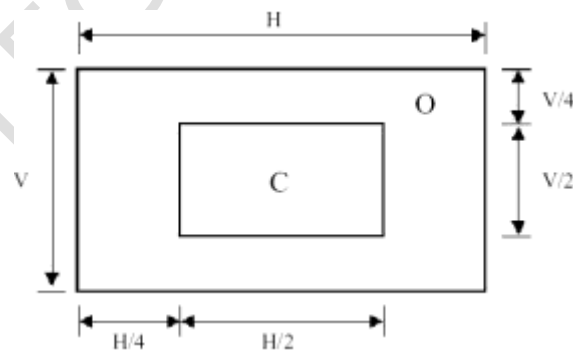

C Area: Center of display area **O Area:** Outer of display area

[Note 4] Judge the defect dot and the adjacent dot as following. Allow below (as A, B, C and D status) adjacent defect dots, including bright and dark adjacent dot. And they will be counted 2 defect dots in total quantity.

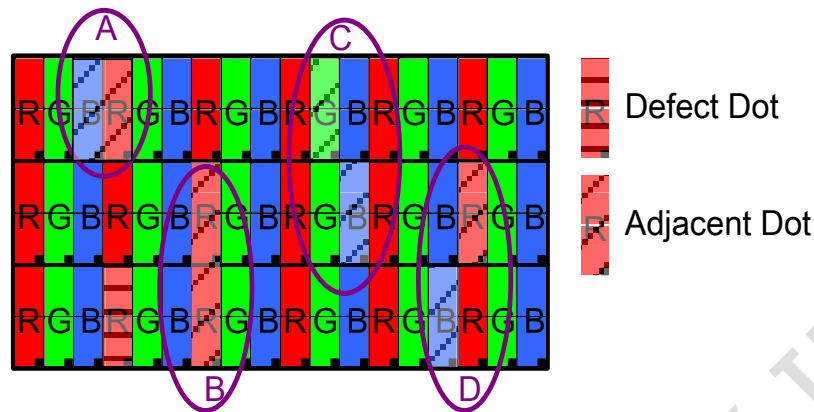

The defects that are not defined above and considered to be problem shall be reviewed and discussed by both parties.

Defects on the Black Matrix, out of Display area, are not considered as a defect or counted.

[Note 5]

According to the technical information from LCD manufacturer, the image retention may happen on LCD display if the static image is kept for a period of time without any change. ICOP will suggest customers not to have static image on LCD for over 4 hours without any image movement and also enable screensaver to avoid image sticking issue if LCD displays need to be kept on for a long time.


Some Image retention issue will disappear when LCD display is turned off for a period of time, but some image retention may be not reversible when LCD encounters screen burn.

The following is LCD manufacturer's test result for customers' reference.


TEST ITEMS	CONDITIONS	NOTE
High Temperature Operation	70°C ;240hrs	
High Temperature Storage	80°C ; 240hrs	
High Temperature High Humidity Operation	60°C ; 90%RH ;240hrs	No condensation
Low Temperature Operation	-20°C ; 240hrs	Backlight unit always turn on
Low Temperature Storage	-30°C ; 240hrs	
Thermal Shock	-30°C (0.5hr) ~ 80°C (0.5hr) ; 200 Cycles	
Image Sticking	25°C ; 4hrs	Note 5-1
MTBF	20,000Hrs	

Note 5-1

1. Condition of Image Sticking test : $25\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$.
2. Operation with test pattern sustained for 4 hrs, then change to gray pattern immediately.
3. After 5 mins, the mura must be disappeared completely.

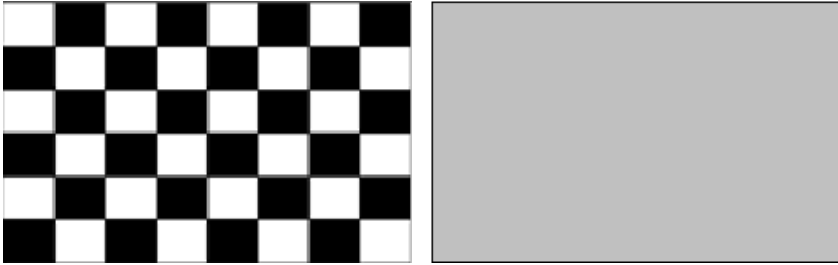

1.4 Product Dimensions

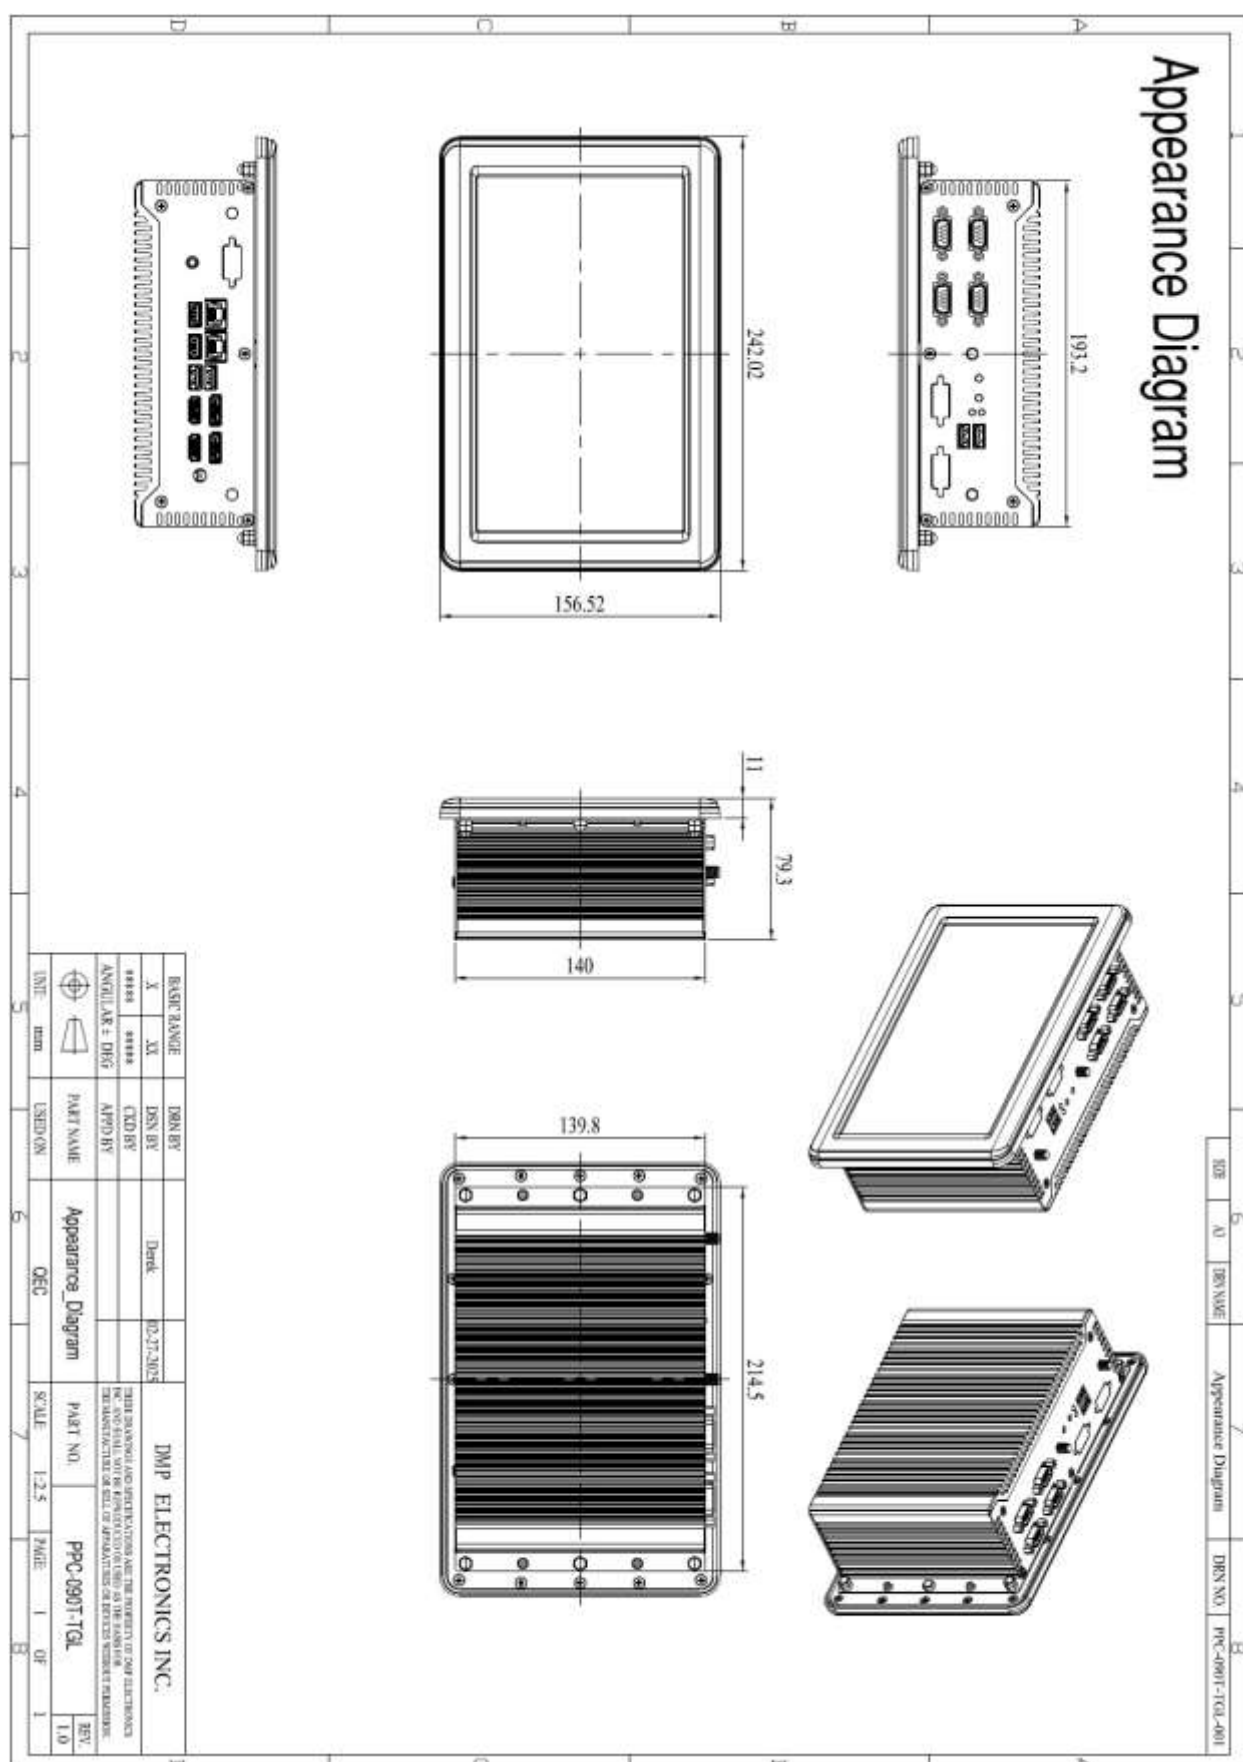


1.5 Mounting Instruction

- **VESA Mounting**

PPC-090T-TGL series support VESA Mount (75x75mm & 100x100mm) that is an optional for ordering. Please contact your region sales for ordering.

Ordering part number: **VESA-MT-PPC-TGL-SET**

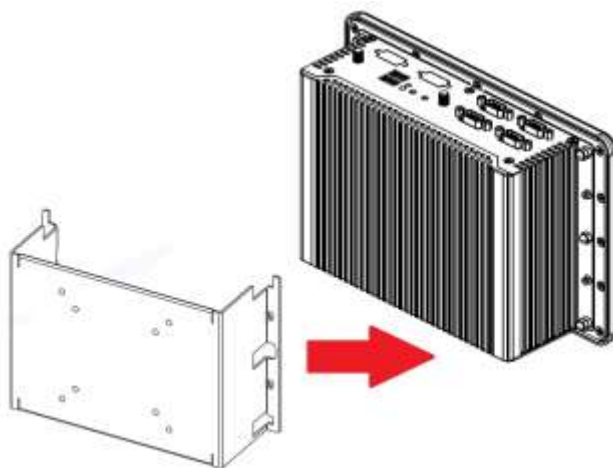

1. Place VESA bracket and VESA-MT-PPC-TGL-SET together.
2. Lock 4 screws and nuts on both of VESA bracket and VESA-MT-PPC-TGL-SET.



3. Remove 4 hexagonal nuts by an 8mm of hexagonal or movable wrench.



4. Plug the VESA-MT-PPC-TGL-SET in the PPC.



Please be careful to make sure the metal pillar on the bottom of small hole.



5. Lock 4 hexagonal nuts back by an 8mm of hexagonal or movable wrench, and make sure each hexagonal nut is tightened.



6. Hang the PPC on the VESA bracket.

ICOP TECHNOLOGY

1.6 Ordering Information

Product Code	LCD Size	CPU Series	RAM
PPC	090T	TGL	8G 16G 32G 64G P8G P16G P32G P64G

1. Product Code : Code 1~3.

PPC : Panel PC Series.

2. LCD Size : Code 4~7.

090T : 9" LCD with Resistive touch screen.

3. CPU Serial : Code 8~10.

TGL: Intel® Tiger Lake Series.

3. Touch Type & RAM : Code 11~14.

Analog Resistive Touch Panel:

8G : 8GB. 16G : 16GB. 32G : 32GB 64G : 64GB

PCAP Touch Panel:

P8G : 8GB. **P16G** : 16GB. **P32G** : 32GB **P64G** : 64GB

PS: Power adapter and cord must be showed separate because different county has different power cord. The part numbers of power adapter and cord are as below.

(Please contact ICOP sales person or distributor to get the unit price of power adapter and cord. Thank you.)

POWER-12V7.5A-CWT

POWERCABLE(A) / POWERCABLE(G) / POWERCABLE(AU) / POWERCABLE(EN)

(A = American; G = Euro; AU = Australia; EN = England/UK)

PART NUMBER	DESCRIPTION
PPC-090T-TGL-8G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /8GB DRAM/6U/2.5GbE LAN/4S/Resistive Touch
PPC-090T-TGL-16G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /16GB DRAM/6U/2.5GbE LAN/4S/Resistive Touch
PPC-090T-TGL-32G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /32GB DRAM/6U/2.5GbE LAN/4S/Resistive Touch
PPC-090T-TGL-64G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /64GB DRAM/6U/2.5GbE LAN/4S/Resistive Touch
PPC-090T-TGL- P8G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /8GB DRAM/6U/2.5GbE LAN/4S/ PCAP Touch
PPC-090T-TGL- P16G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /16GB DRAM/6U/2.5GbE LAN/4S/ PCAP Touch
PPC-090T-TGL- P32G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /32GB DRAM/6U/2.5GbE LAN/4S/ PCAP Touch
PPC-090T-TGL- P64G	9" Panel PC w/Intel Tiger Lake i5-1135G7 /64GB DRAM/6U/2.5GbE LAN/4S/ PCAP Touch
POWER-12V7.5A-CWT	AC – DC power adapter / DC12V @ 7.5A (AC 100 ~ 240V Input)
POWERCABLE(A) / POWERCABLE(G) / POWERCABLE(AU) / POWERCABLE(EN)	US / Euro / Australia / England & UK power cord for POWER-12V7.5A-CWT
VESA-MT-PPC-TGL-SET	VESA mount bracket set

Ch. 2

System Installation

[2.1 CPU Board Outline](#)


[2.2 Connector Summary](#)

[2.3 Connector Pin Assignments](#)

[2.4 External I/O Overview](#)

[2.5 External I/O Pin Assignment](#)

2.1 CPU Board Outline

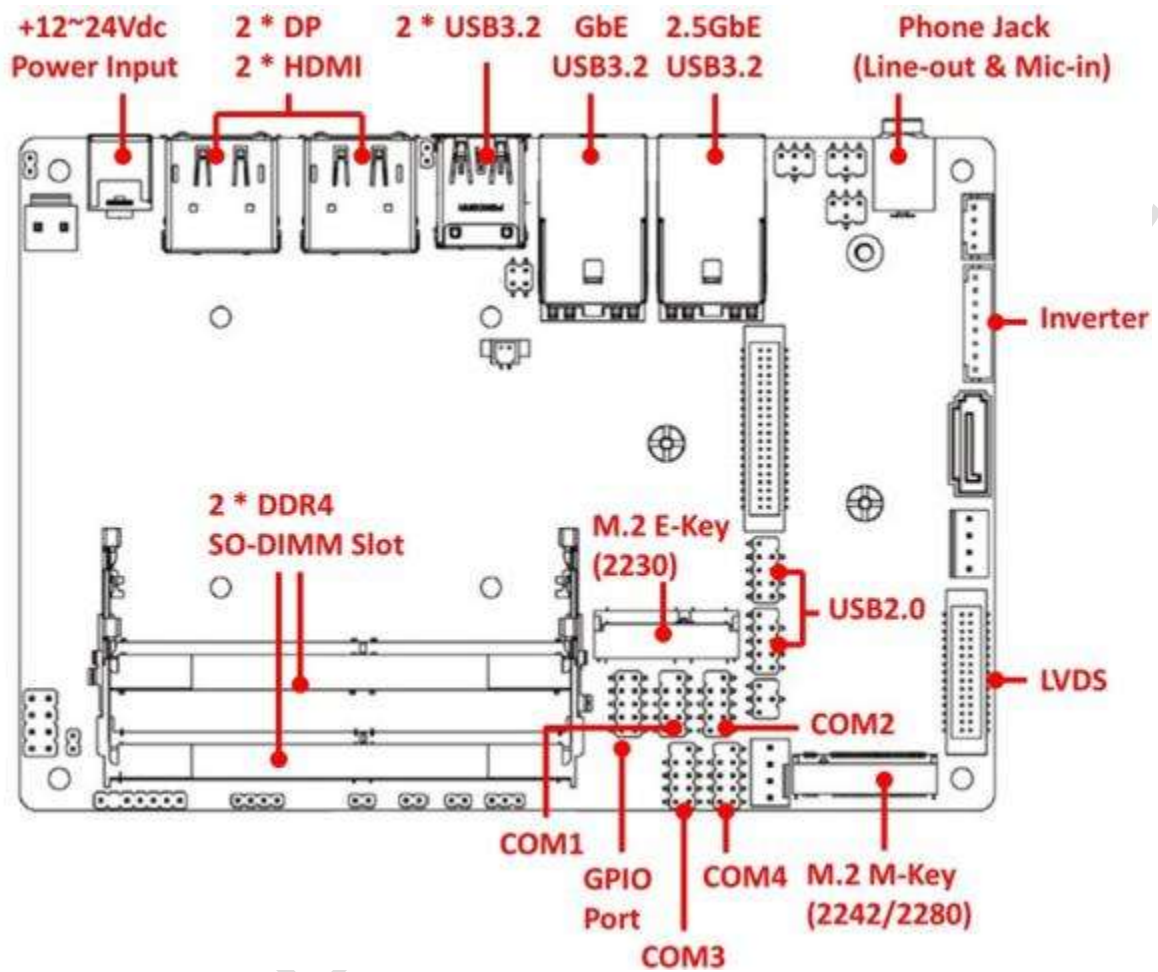

PPC TGL CPU Board

2.2 Connector Summary

Connector	Type of Connections	Pin #
DDR4 SO-DIMM Slot	External SO-DIMM Slot	260-pin
Power DC Jack	External Power DC Jack Connector	2-pin
2 * USB3.2	External Dual USB3.1 Connector	18-pin
2 * DP	External Dual DP Connector	20-pin
2 * HDMI	External Dual HDMI Connector	38-pin
GbE	External Dual RJ45 Connector	16-pin
2.5GbE	External Dual RJ45 Connector	16-pin
M.2 M-Key	External M.2 M-Key (2242/2280) PCIe Gen. 3 *2 / SATA interface support NVME	75-pin
M.2 E-Key	External M.2 E-Key	75-pin
COM1 & COM2 (RS232/422/485)	2.0mm 9-pin pin header	9-pin
COM3 & COM4 (RS232)	2.0mm 9-pin pin header	9-pin
GPIO	2.0mm 10-pin pin header	10-pin
USB2.0 x 2	2.0mm 9-pin pin header	9-pin
LVDS	1.25mm 30-pin box header	30-pin
INVERTER	2.0mm 8-pin box header	8-pin

2.3 Connector Pin Assignments

Power DC Jack

Pin #	Signal Name
1	+12~24V Power Input
2	GND

COM1 & COM2 (RS232/422/485)

Pin #	Signal Name	Pin #	Signal Name
1	DCD1 /422TX- /RS485-	2	DSR1
3	RXD1 /422TX+ /RS485+	4	RTS1
5	TXD1/422RX+	6	CTS1
7	DTR1/422RX-	8	RI1
9	GND		

COM3 & COM4 (RS232)

Pin #	Signal Name	Pin #	Signal Name
1	DCD2	2	DSR2
3	RXD2	4	RTS2
5	TXD2	6	CTS2
7	DTR2	8	RI2
9	GND		

USB2.0 x 2

Pin #	Signal Name	Pin #	Signal Name
1	VCC	2	VCC
3	USB2_D1-	4	USB2_D2-
5	USB2_D1+	6	USB2_D2+
7	GND	8	GND
		10	NC

LVDS

Pin #	Signal Name	Pin #	Signal Name
1	LVDSB_D3-	2	LVDSB_D3+
3	LVDSB_CLK-	4	LVDSB_CLK+
5	LVDSB_D2-	6	LVDSB_D2+
7	LVDSB_D1-	8	LVDSB_D1+
9	LVDSB_D0-	10	LVDSB_D0+
11	NC/DDC_DAT	12	NC/DDC_CLK
13	GND	14	GND/LVDS Detect
15	GND	16	GND
17	LVDSA_D3+	18	LVDSA_D3-
19	LVDSA_CLK+	20	LVDSA_CLK-
21	LVDSA_D2+	22	LVDSA_D2-
23	LVDSA_D1+	24	LVDSA_D1-
25	LVDSA_D0+	26	LVDSA_D0-
27	LCD_VDD	28	LCD_VDD
29	LCD_VDD	30	LCD_VDD


Inverter

Pin #	Signal Name
1	Backlight_Enable
2	Backlight_PWM
3	Backlight LED VCC
4	Backlight LED VCC
5	GND
6	GND
7	Backlight UP SW
8	Backlight DN SW

GPIO

Pin #	Signal Name	Pin #	Signal Name
1	GPIO80	2	GPIO81
3	GPIO82	4	GPIO83
5	GPIO84	6	GPIO85
7	GPIO86	8	GPIO87
9	GND	10	VCC

2.4 External I/O Overview

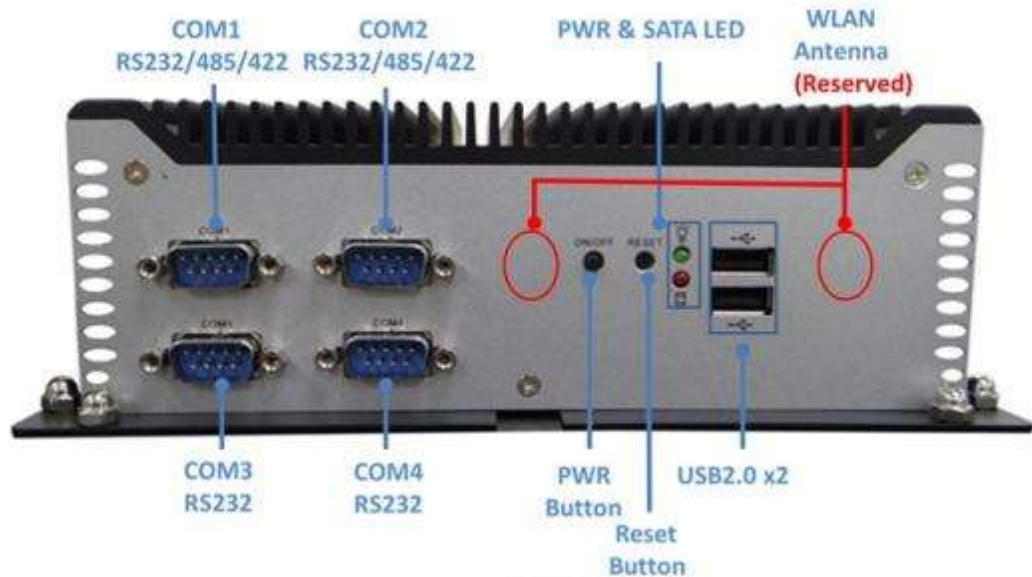

TOP



Bottom


NOTE: The RS232/422/485 function of COM1 & COM2 is selected by BIOS setting. Please refer the section, 4.3 to set the function in the BIOS setup.

2.5 External I/O Pin Assignment


Power DC Jack (+12~24Vdc Power Adapter)

	Pin #	Signal Name
	1	+12~24Vdc
	2	GND


COM1 & COM2 (RS232/422/485) (Change mode by BIOS Setup)

	Pin #	Signal Name	Pin #	Signal Name
	1	DCD1 /422TX- /RS485-	2	RXD1 /422TX+ /RS485+
	3	TXD1 /422RX+	4	DTR1 /422RX-
	5	GND	6	DSR1
	7	RTS1	8	CTS1
	9	RI1		

COM3 & COM4 (RS232)

	Pin #	Signal Name	Pin #	Signal Name
	1	DCD2	2	RXD2
	3	TXD2	4	DTR2
	5	GND	6	DSR2
	7	RTS2	8	CTS2
	9	RI2		

GbE & 2.5 GbE

	Pin #	Signal Name	Pin #	Signal Name
	1	TP0+	2	TP0-
	3	TP1+	4	TP2+
	5	TP2-	6	TP1-
	7	TP3+	8	TP3-


HDMI

	Pin #	Signal Name
	1	TMDS_Data2+
	2	TMDS_Data2_Shield
	3	TMDS_Data2-
	4	TMDS_Data1+
	5	TMDS_Data1_Shield
	6	TMDS_Data1-
	7	TMDS_Data0+
	8	TMDS_Data0_Shield
	9	TMDS_Data0-
	10	TMDS_CLK+
	11	TMDS_CLK_Shield
	12	TMDS_CLK-
	13	CEC
	14	Reserved
	15	SCL
	16	SDA
	17	DDC/CEC_GND
	18	+5V Power
	19	Hop_Plug_Detect


USB2.0

	Pin #	Signal Name
	1	VCC
	2	USB0-
	3	USB0+
	4	GND

DP

	Pin #	Signal Name
	1	ML_Lane 0 (p)
	2	GND
	3	ML_Lane 0 (n)
	4	ML_Lane 1 (p)
	5	GND
	6	ML_Lane 1 (n)
	7	ML_Lane 2 (p)
	8	GND
	9	ML_Lane 2 (n)
	10	ML_Lane 3 (p)
	11	GND
	12	ML_Lane 3 (n)
	13	CONFIG1
	14	CONFIG2
	15	AUX_CH (p)
	16	GND
	17	AUX_CH (n)
	18	Hot Plug
	19	DP_PWR Return
	20	DP_PWR

GPIO

	Pin #	Signal Name	Pin #	Signal Name
	1	GPIO80	2	GPIO81
	3	GPIO82	4	GPIO83
	5	GPIO84	6	GPIO85
	7	GPIO86	8	GPIO87
	9	GND		

USB 3.1

	Pin #	Signal Name
	1	VCC
	2	D-
	3	D+
	4	GND
	5	SSRX-
	6	SSRX+
	7	GND
	8	SSTX-
	9	SSTX+

Ch. 3

Hardware Installation

PPC-090T-TGL supports various kinds of storages for industrial application, divided into M.2 2242/2280 PCIe (M-Key).

[3.1 Installing the M.2 M-key \(2242/2280\) PCIe Storage](#)

[3.2 Installing the M.2 E-Key \(2230\) Modules](#)

3.1 Installing the M.2 M-key (2242/2280) PCIe Storage

PPC-090T-TGL series support M.2 M-key (2242/2280) PCIe Gen. 4 Support NVME, **but doesn't support SATA interface**. Please refer the below instructions.

[STEP]

1. Remove 6 hexagonal nuts by an 8mm of hexagonal or movable wrench.




2. Pull up rear cover carefully, which LCD, Backlight and Touch cables inside the rear cover and please be careful to open it.



3. Support M.2 M-Key 2240/2280 PCIe storage, which the brown area is for 2242

and red area is for 2280.

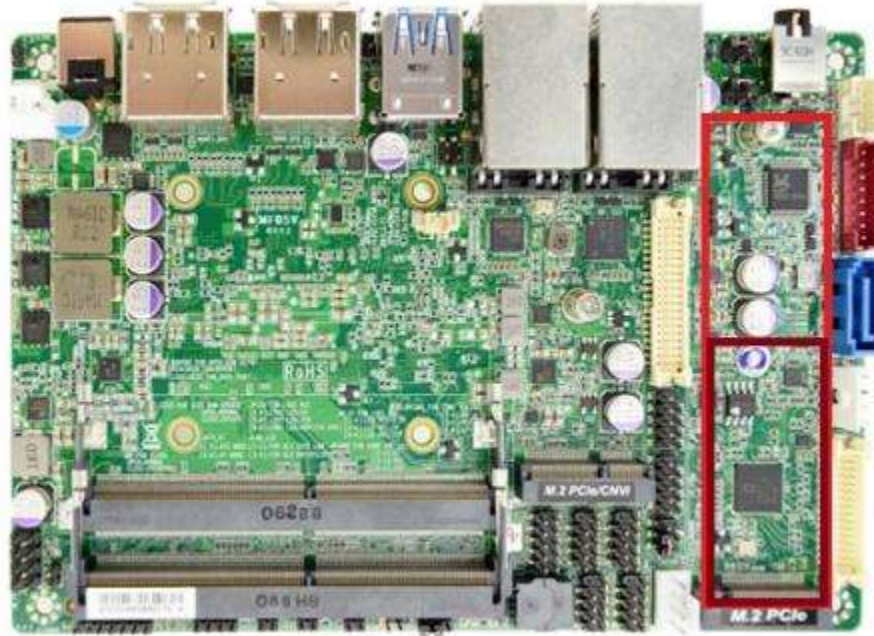

4. For 2242 or 2280 storage, please use a M2 screw driver to remove the top screw in advance, and then use M4 screw driver to move the bottom screw to the correct position.
5. Plug the M.2 storage in the slot and lock it up.



6. Take the rear cover back and lock 10 hexagonal nuts by an 8mm of hexagonal or movable wrench.

ICOP offers the standard M2. 2280 PCIe Gen. 4x4 storage as below.

[SPEC]

Standard M.2 2280 form factor
80 x 22 x 3.8 mm



[M.2 2280 PCIE GEN. 4X4 LIST]

P/N	Flash Type	Capacity	Operating Temperature
M280P4-512G-TG	TLC	512GB	0°C ~ +70°C
M280P4-1T-TG	TLC	1TB	0°C ~ +70°C
M280P4-2T-TG	TLC	2TB	0°C ~ +70°C
M280P4-512G-TG- X	TLC	512GB	-40°C ~ +85°C
M280P4-1T-TG- X	TLC	1TB	-40°C ~ +85°C
M280P4-2T-TG- X	TLC	2TB	-40°C ~ +85°C

3.2 Installing the M.2 E-Key (2230) Modules

PPC-090T-TGL series support M.2 E-key (2230) USB2.0/PCIe *1 interface. Please refer the below instructions.

[STEP]


1. Remove 10 hexagonal nuts by an 8mm of hexagonal or movable wrench.



2. Pull up rear cover carefully, which LCD, Backlight and Touch cables inside the rear cover and please be careful to open it.



3. Remove the screw and plug the M.2 E-Key (2230) module on the slots, and then lock it up.

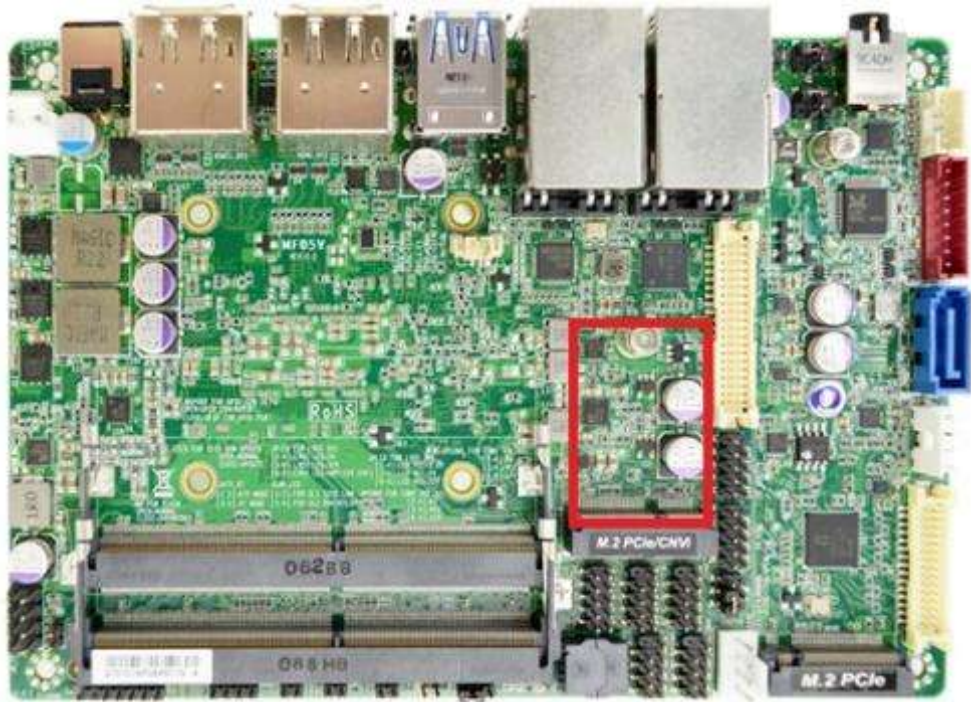

4. Take the rear cover back and lock 10 hexagonal nuts by an 8mm of hexagonal or movable wrench.

Ch. 4

Drivers and BIOS Instruction

[4.1 Operating System Support and Drivers](#)

[4.2 BIOS Hot Key](#)

[4.3 BIOS COM1 & COM2 Setting \(RS232/RS422/RS485\)](#)

[4.4 BIOS COM3 & COM4 Setting \(Change Settings\)](#)

[4.5 BIOS AT Mode Setting \(Support Auto-Power On Function\)](#)

[4.6 BIOS Serial Port Console Redirection](#)

[4.7 BIOS Load Default Setting](#)

4.1 Operating System Support and Drivers

The PPC-090T-TGL provides the Win10 and Win11 drivers.

Please get the drivers from ICOP technical support URL:

https://www.icop.com.tw/resource_entrance

For Linux, most Linux distributions support Intel® Tiger Lake Processor and user can install Linux upon PPC-090T-TGL directly. Please contact your region sales for technical support if you have any question.

4.2 BIOS Hot Key

After power on, it supports BIOS hot key as below.



Press < **Del** > to enter the AMI BIOS setup



Press < **F7** > to enter Popup Menu

4.3 BIOS COM1 & COM2 Setting (RS232/422/485)

COM1 and COM2 can be set to be RS232/422/485 function. Please refer the instruction as below.


(1) In the BIOS Setup, please go to “Advanced” and “Super IO Configuration”.



(2) Go to “Serial Port 1 Configuration”.




(3) Go to “Transmission Mode Select” and set RS232/422/485 function.

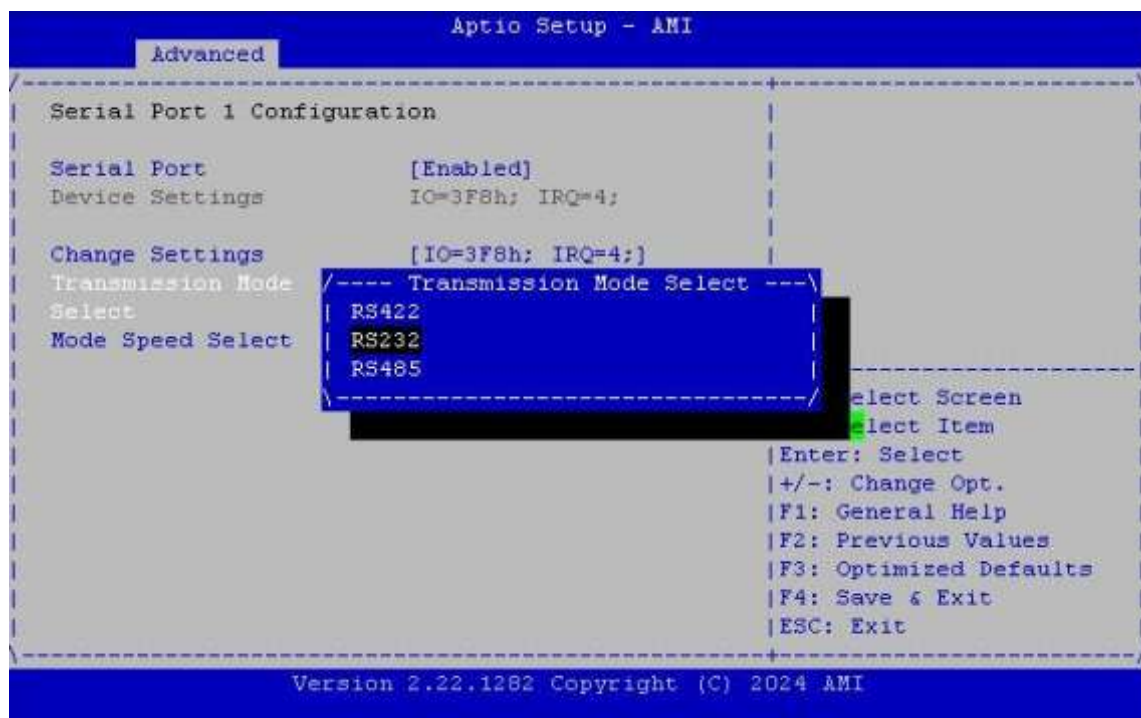


(4) Press “Esc” key to back and choose “Serial Port 2 Configuration”.



(5) Go to “Transmission Mode Select” and set RS232/422/485 function.

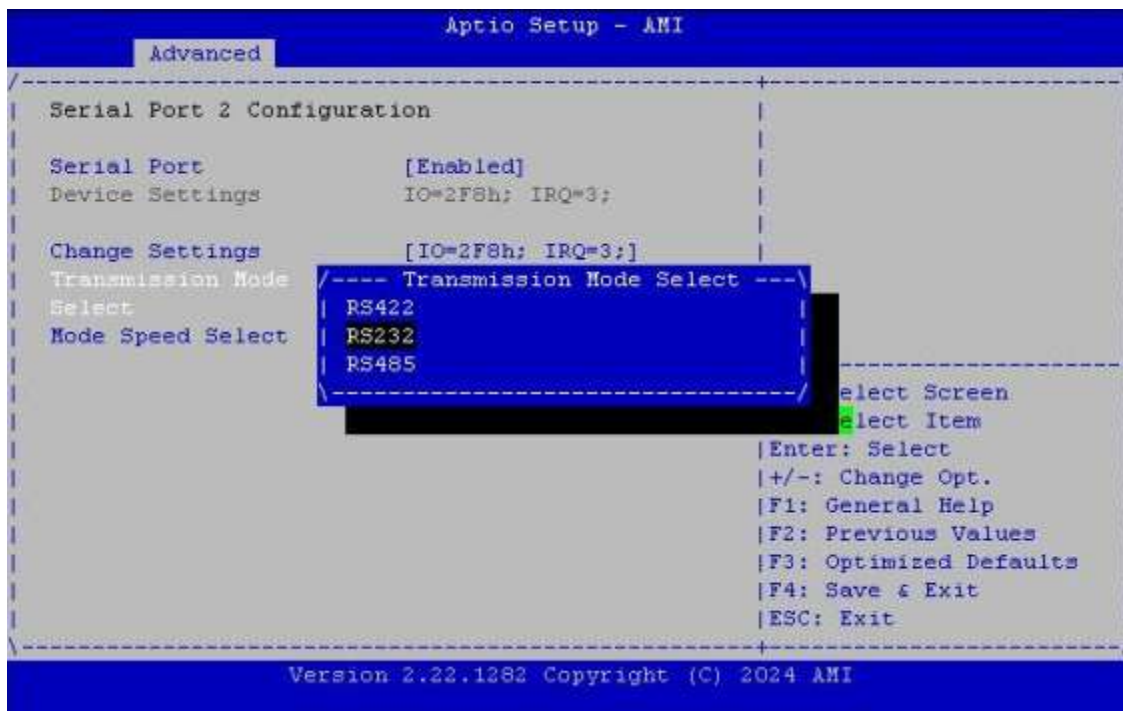


(6) After setting, please press “F4” key to save & exit.

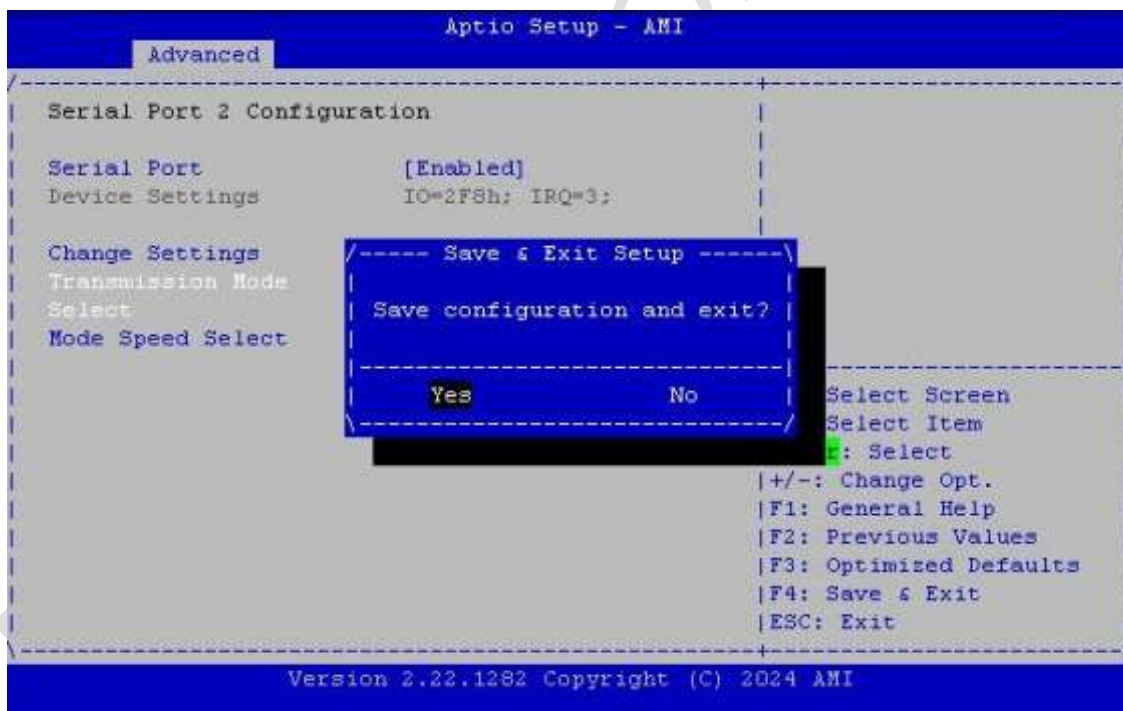

4.4 BIOS COM3 & COM4 Setting (Change Settings)

COM3 and COM4 can be changed settings as below.


(1) In the BIOS Setup, please go to “Advanced” and “Super IO Configuration”.

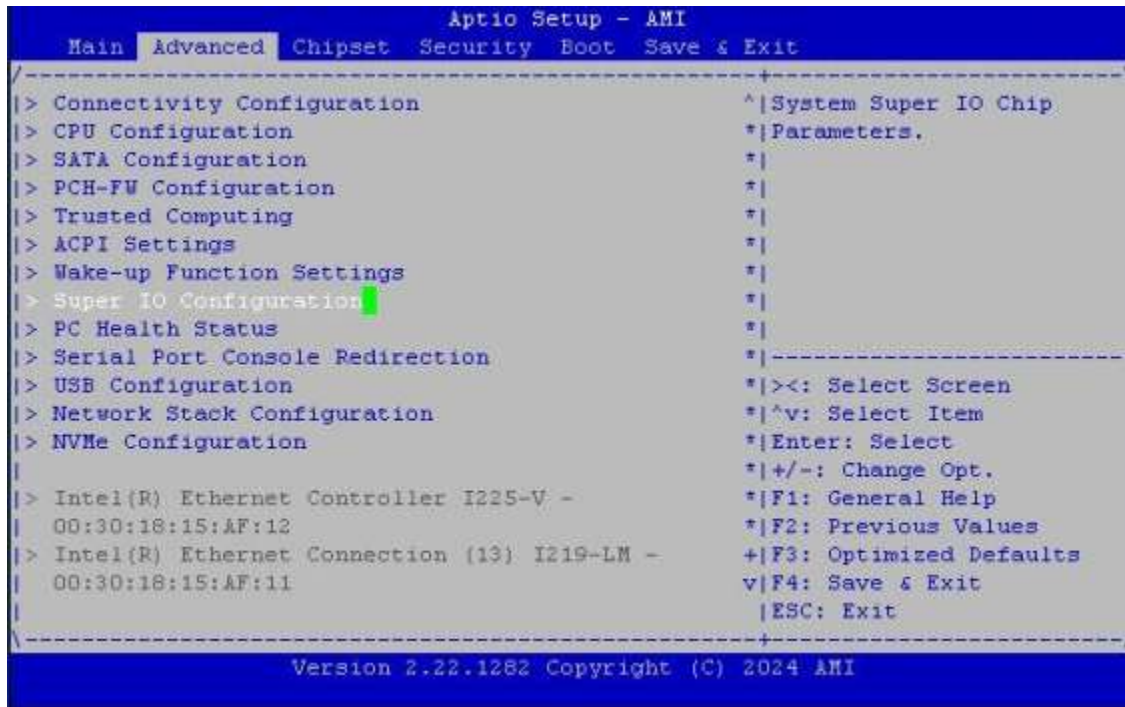


(2) Go to “Serial Port 3 Configuration”.




(3) Go to “Change Settings” and set IO address and IRQ if you want.

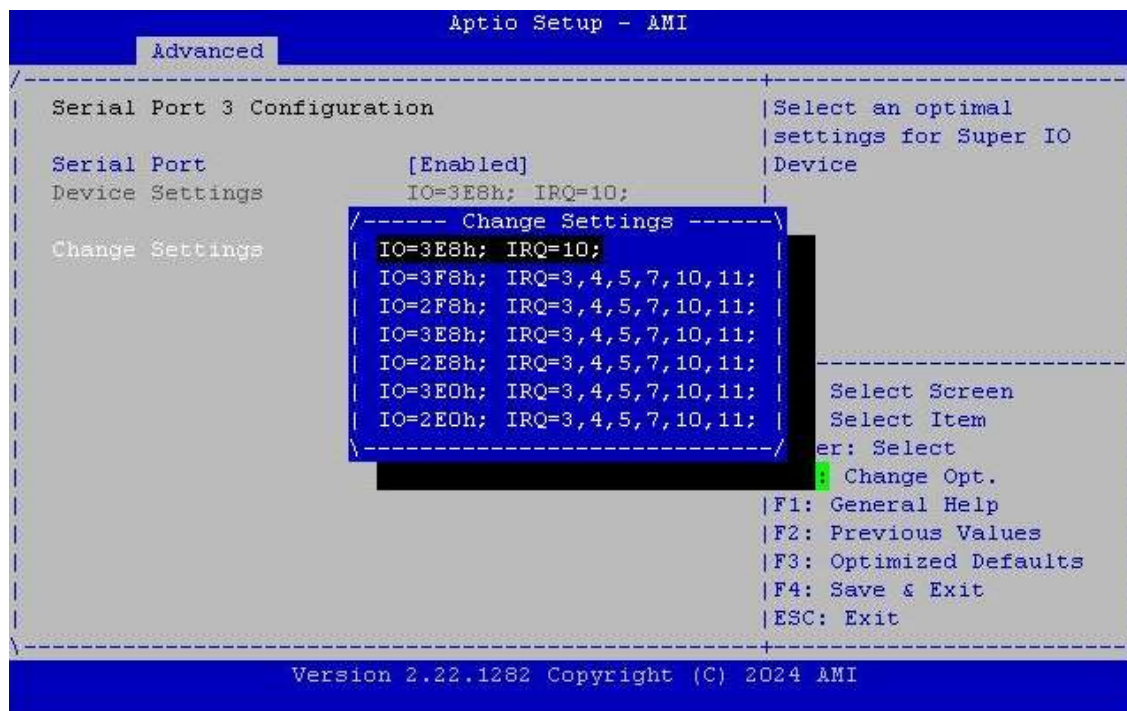

(4) Press “Esc” key to back and choose “Serial Port 4 Configuration”.

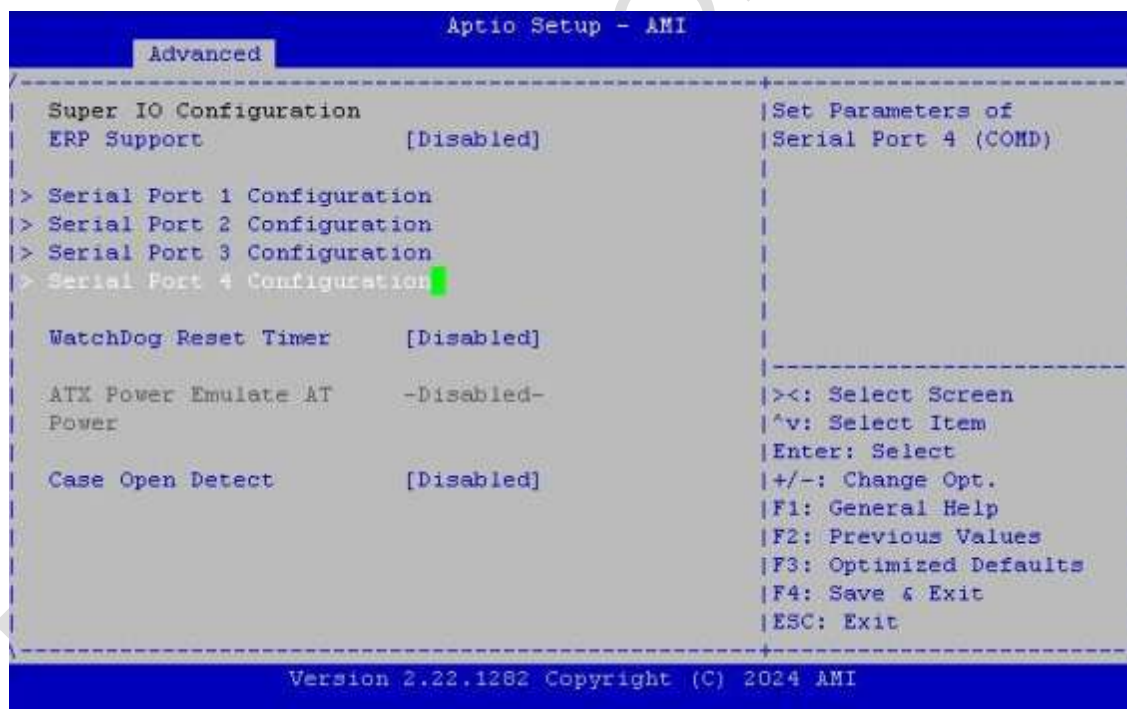

(5) Go to “Change Settings” and set IO address and IRQ if you want.

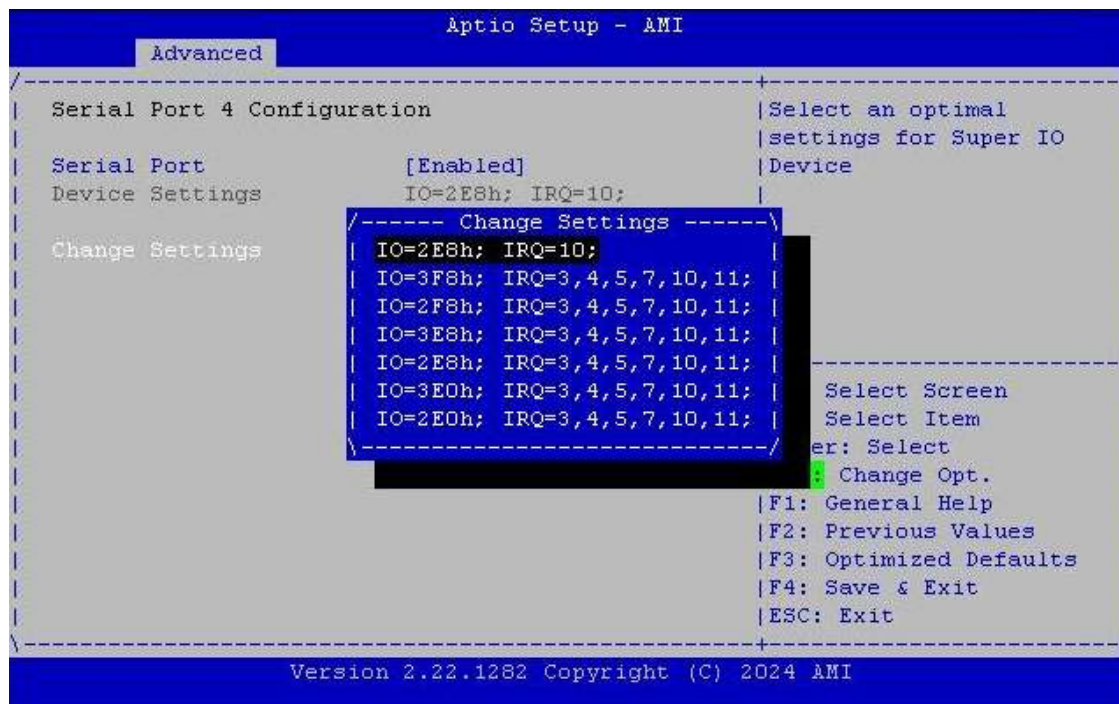

(6) After setting, please press “F4” key to save & exit.




4.5 BIOS AT Mode Setting (Support Auto-Power On Function)

PPC-090T-TGL supports “Auto-Power On function”, user doesn’t need to press “power button” for system power on and just needs to plug power source input and system will be power on automatically.

(1) In the BIOS Setup, please go to “Chipset” and “PCH-IO Configuration”.



(2) Set “System State After Power Failure” to be “Always On”.

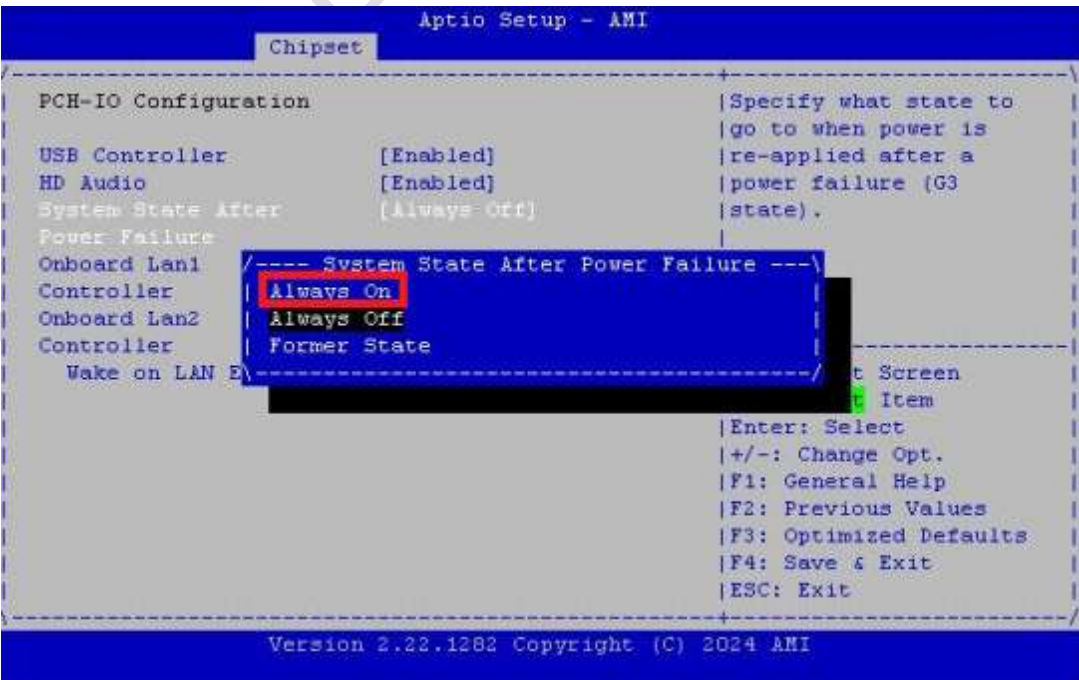

(3) After setting, please press “F4” key to save & exit.




Note:

After system shut down by operating system, PPC-090T-TGL will be power-off. For next booting up, user just needs to re-plug power adapter or power reset again, while system will be boot-up automatically.


4.6 BIOS Serial Port Console Redirection

PPC-090T-TGL supports Serial Port Console Redirection as below.


(1) Go to “Advanced” and “Serial Port Console Redirection”.

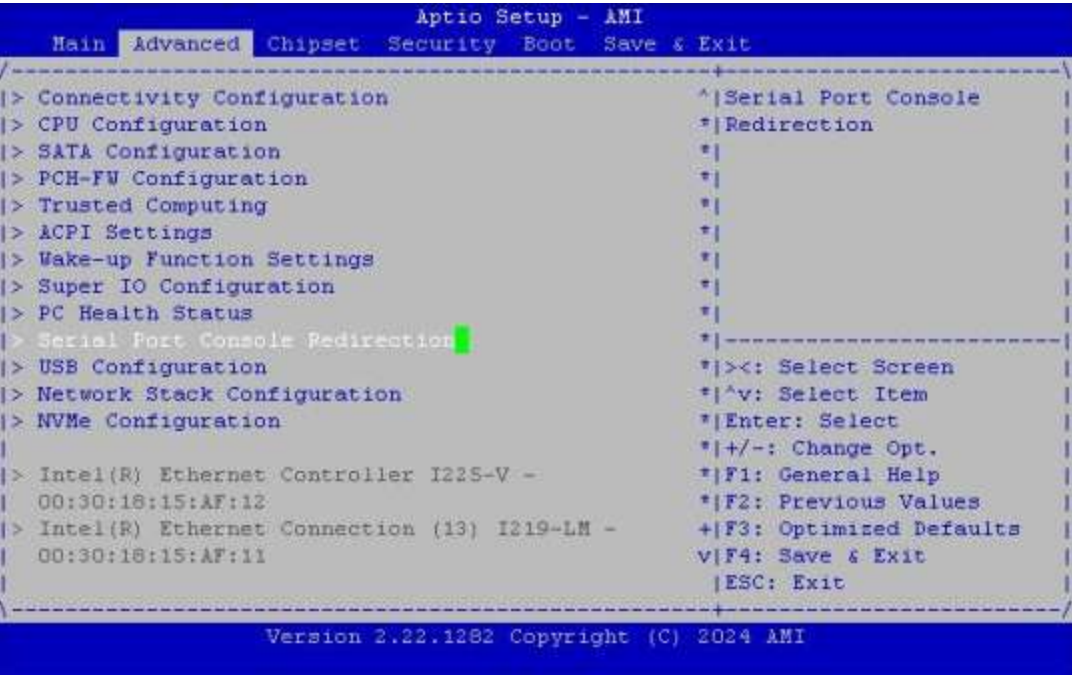

(2) Set “Console Redirection” to be “Enabled”.

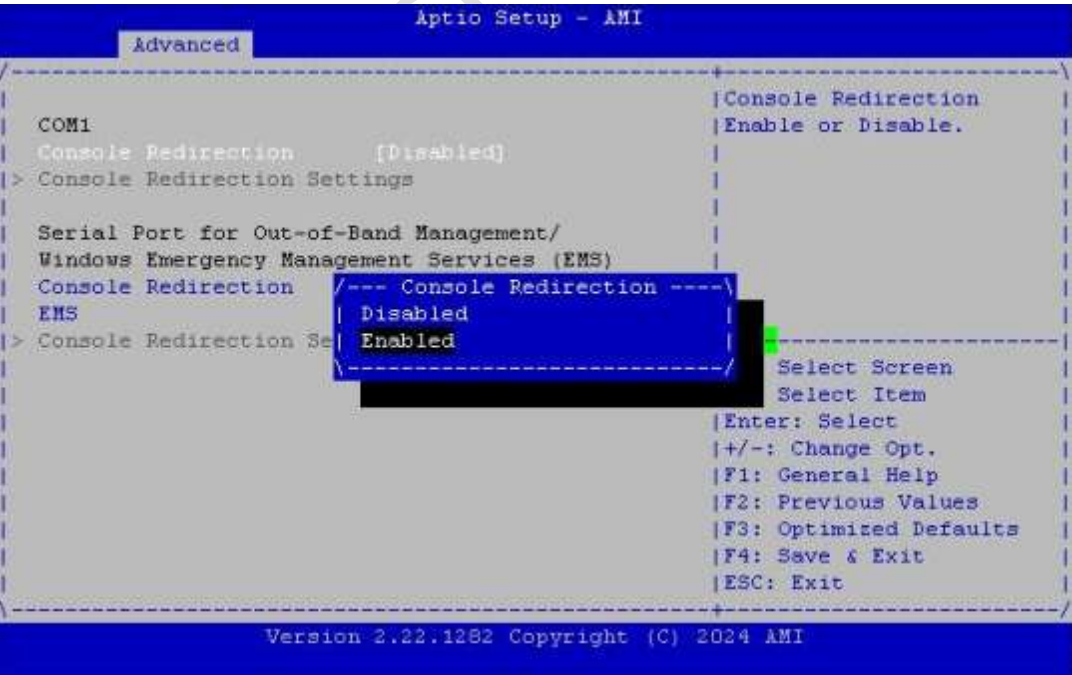

(3) Go to “Console Redirection Settings”.

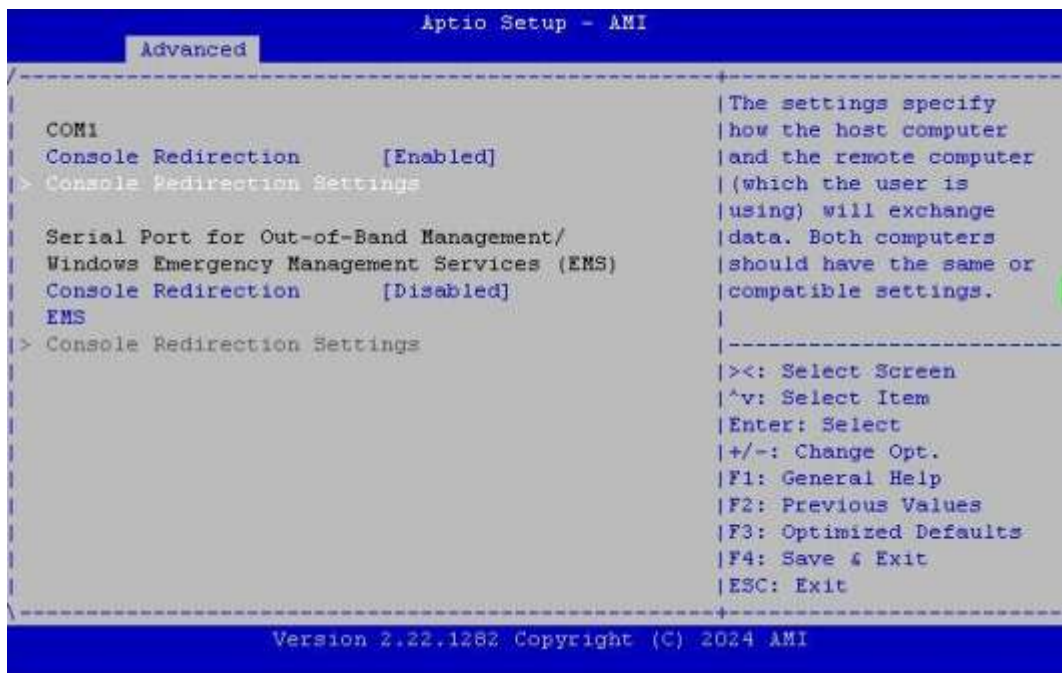

(4) Set “Terminal Type” to “VT100+”.

Emulation: [VT100]: ASCII char set.


[VT100+]: Extended VT100 to support color, function keys, etc.

[VT-UTF8]: Uses UTF8 encoding to map Unicode chars onto 1 or more Bytes.

[ANSI]: Extended ASCII char set.



(4) After setting, please press “F4” key to save & exit.

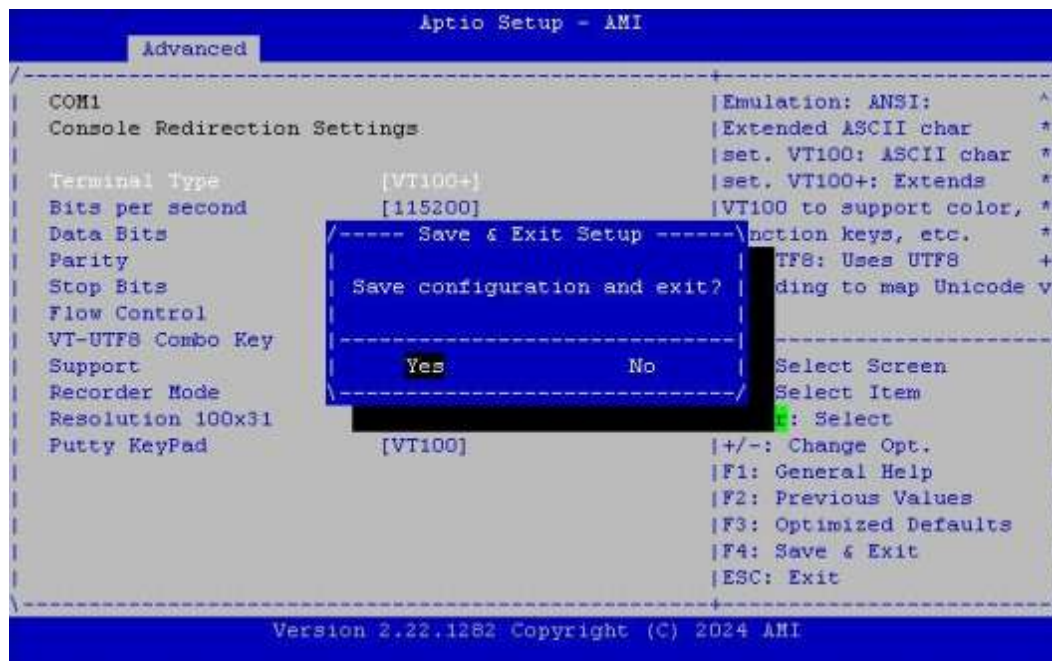


4.7 BIOS Load Default Setting

(1) Press “F3” key to load optimized defaults.



(2) After setting, please press “F4” key to save & exit.

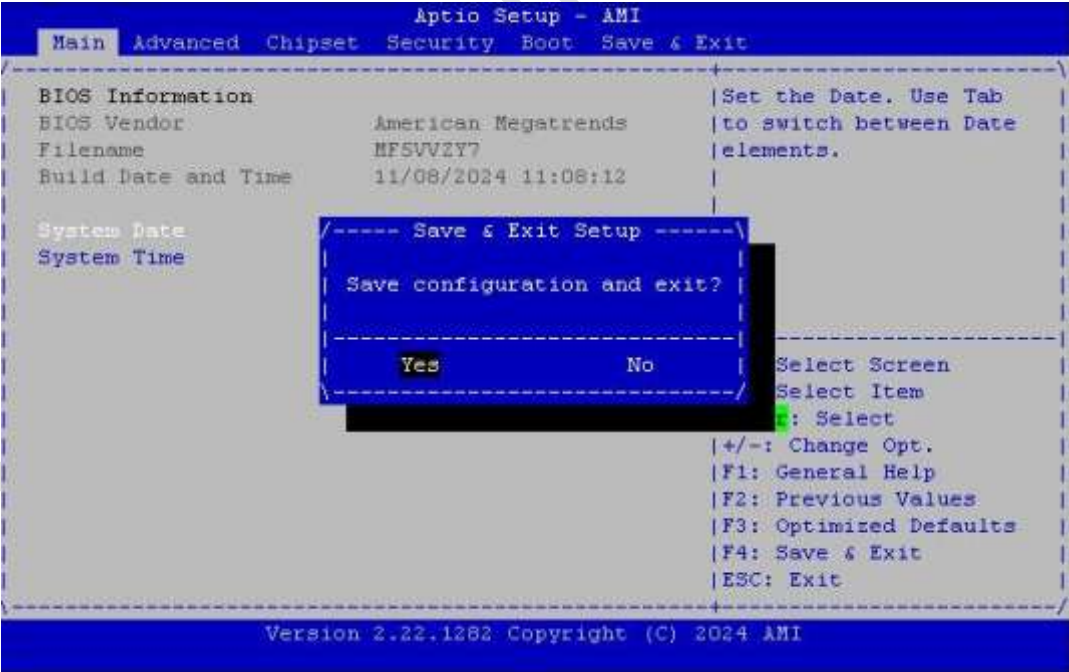

Warranty

This product is warranted to be in good working order for a period of one year from the date of purchase. Should this product fail to be in good working order at any time during this period, we will, at our option, replace or repair it at no additional charge except as set forth in the following terms. This warranty does not apply to products damaged by misuse, modifications, accident or disaster. Vendor assumes no liability for any damages, lost profits, lost savings or any other incidental or consequential damage resulting from the use, misuse of, originality to use this product. Vendor will not be liable for any claim made by any other related party. Return authorization must be obtained from the vendor before returned merchandise will be accepted. Authorization can be obtained by calling or faxing the vendor and requesting a Return Merchandise Authorization (RMA) number. Returned goods should always be accompanied by a clear problem description.

All Trademarks appearing in this manuscript are registered trademark of their respective owners. All Specifications are subject to change without notice.
©ICOP Technology Inc. 2025